

## SPECIFICATIONS

| REF  | Needle<br>Ø (Gauge) | Sheath<br>Ø (mm) | Maximum Needle<br>Length (mm) | Needle Type     | Channel Size<br>(mm) | Working Length<br>(mm) |
|--|---------------------|------------------|-------------------------------|-----------------|----------------------|------------------------|
| EUS-FNB Trident™ Needle (Laser beam Treated) |                     |                  |                               |                 |                      |                        |
| EUS-25-1-N                                   | 25                  | 1,8              | 80                            | Co-Cr Legierung | ≥2,8                 | 1.375~1.415            |
| EUS-22-1-N                                   | 22                  | 1,8              | 80                            | Co-Cr Legierung | ≥2,8                 | 1.375~1.415            |
| EUS-19-1-N                                   | 19                  | 1,8              | 80                            | Co-Cr Legierung | ≥2,8                 | 1.375~1.415            |
| EUS-FNA Premium Needle (Laser beam Treated)  |                     |                  |                               |                 |                      |                        |
| EUS-25-0-N                                   | 25                  | 1,8              | 80                            | Co-Cr Legierung | ≥2,8                 | 1.375~1.415            |
| EUS-22-0-N                                   | 22                  | 1,8              | 80                            | Co-Cr Legierung | ≥2,8                 | 1.375~1.415            |
| EUS-19-0-N                                   | 19                  | 1,8              | 80                            | Co-Cr Legierung | ≥2,8                 | 1.375~1.415            |
| EUS-FNA ECO Needle (Sand Blast Treated)      |                     |                  |                               |                 |                      |                        |
| EUS-25-0                                     | 25                  | 1,8              | 80                            | Stainless Steel | ≥2,8                 | 1.375~1.415            |
| EUS-22-0                                     | 22                  | 1,8              | 80                            | Stainless Steel | ≥2,8                 | 1.375~1.415            |
| EUS-19-0                                     | 19                  | 1,8              | 80                            | Stainless Steel | ≥2,8                 | 1.375~1.415            |

### CAN'T FIND IT?

Additional items may be available. Contact us if you can't find what you need.




No.10, Gaoke 3rd Road, National  
Hi-Tech Zone, Nanjing, China, 210032  
+86-25-58646393


Micro-tech.com.cn/en/  
Sales@micro-tech.com.cn



## FNB-AND-FNA NEEDLE EUS

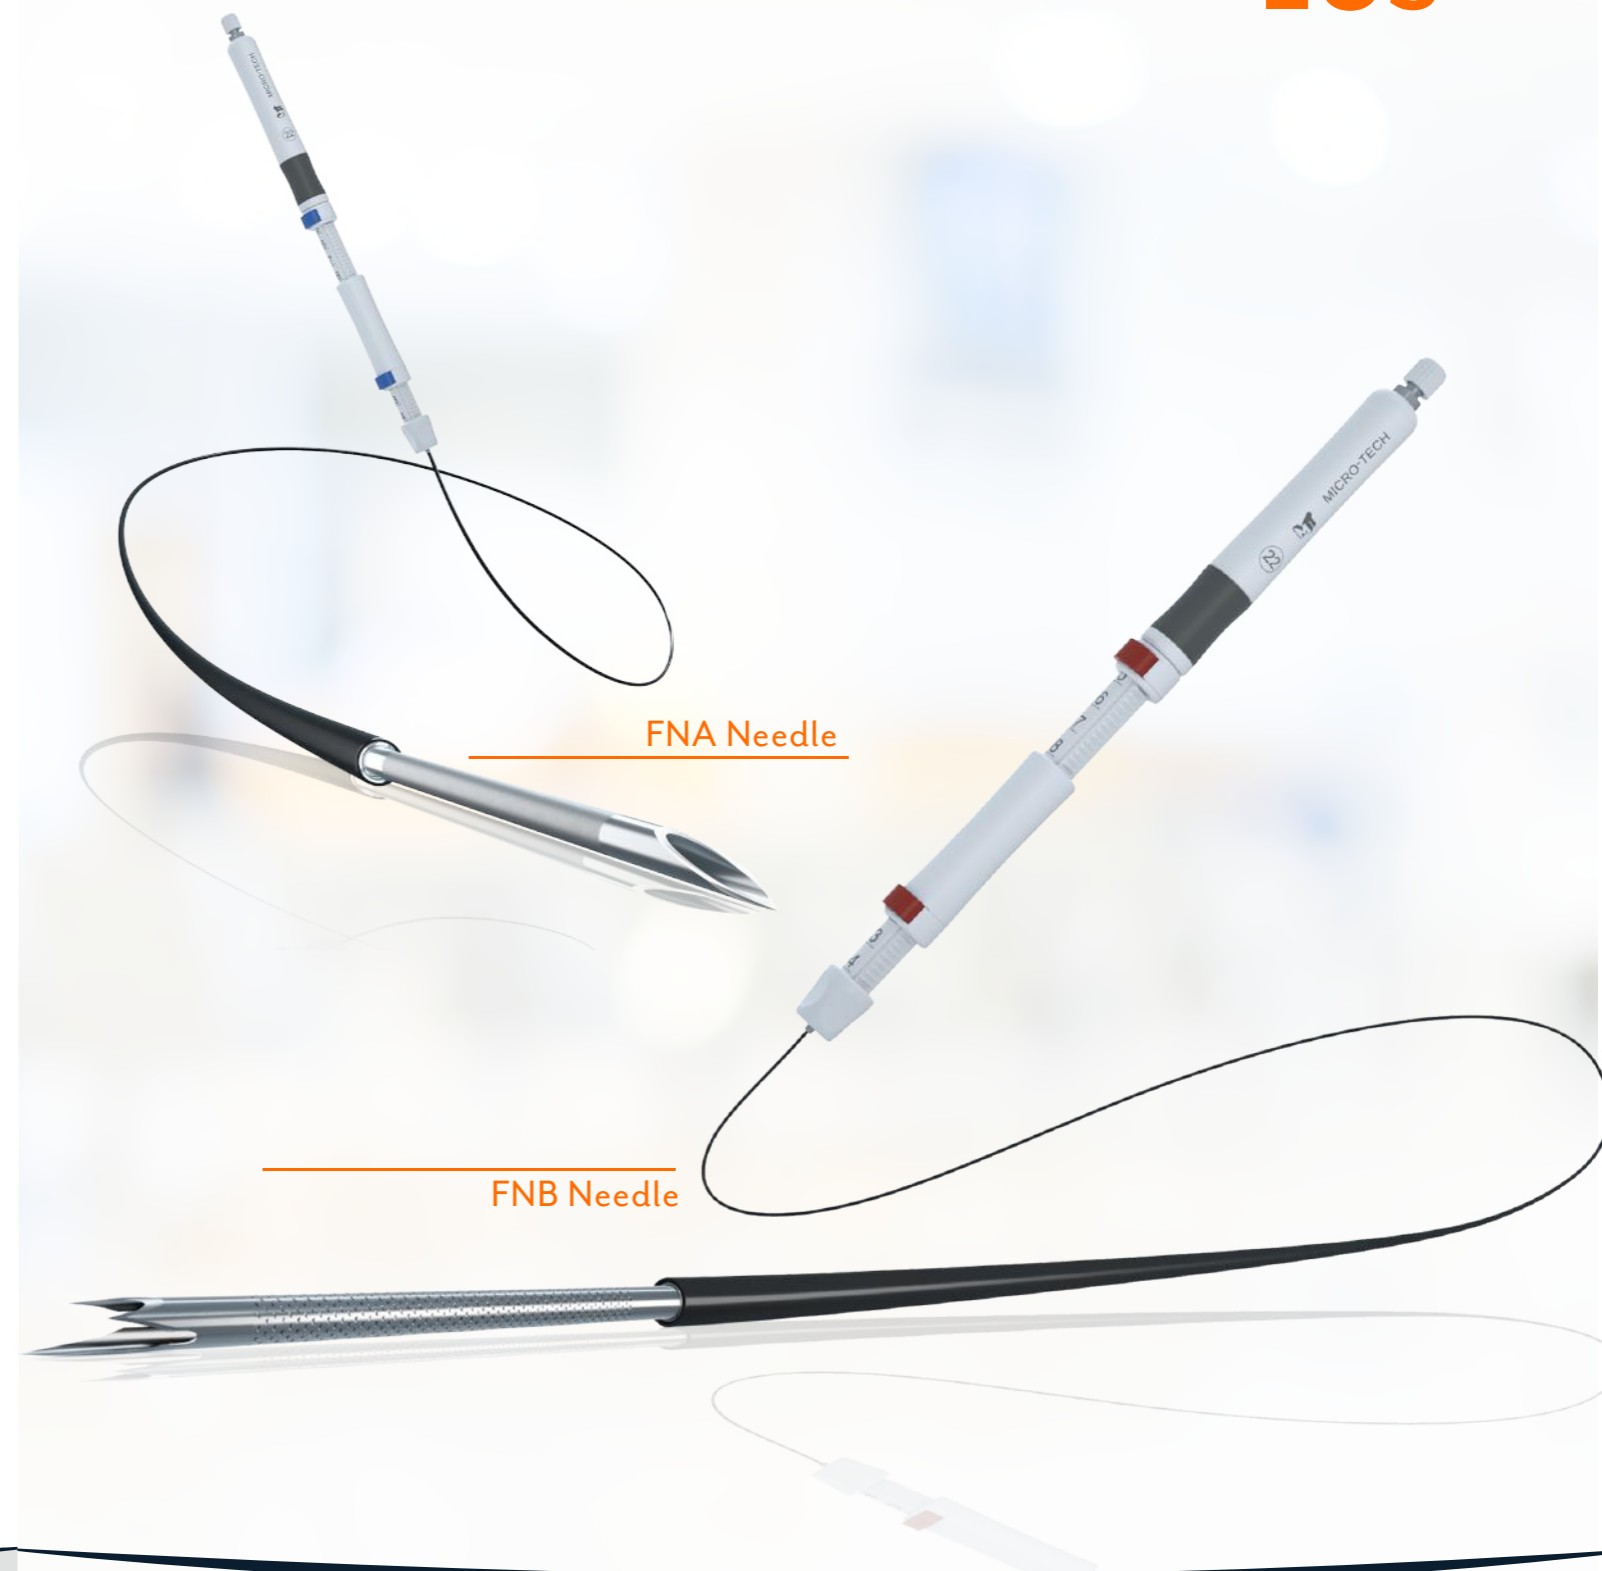

Your Trusted Partner In Endoscopy!

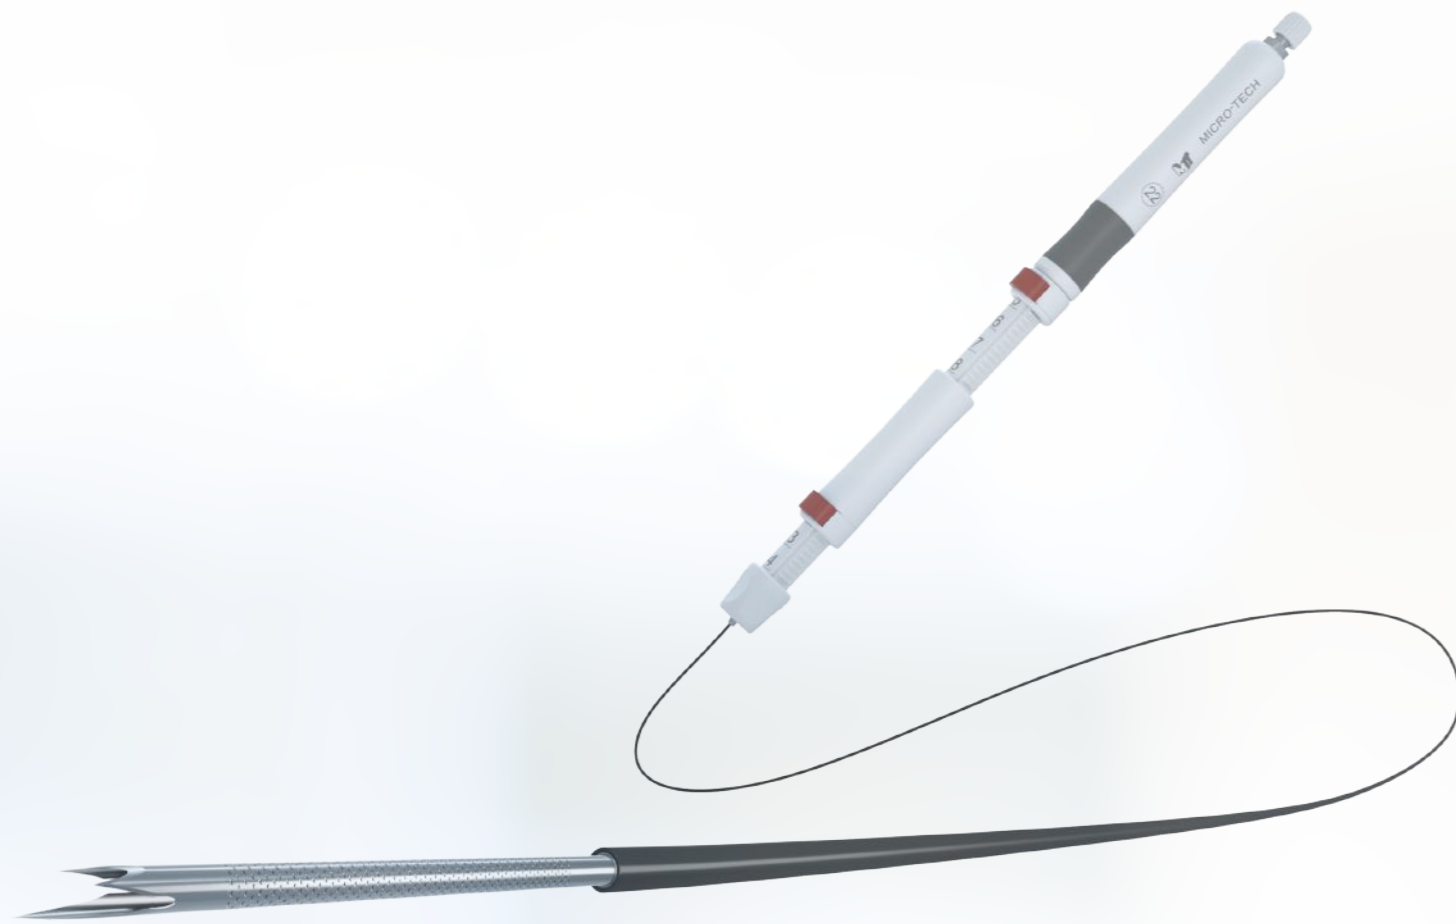

## Trident™ EUS-FNB Needle.

For histological tissue structures.

- Designed for cases when FNA is non-diagnostic or inadequate and tissue architecture is needed.
- Co-Cr alloy needle utilized for enhanced needle flexibility, durability and target accessibility.
- Unique Trident™ multi-blade three-prong tip facilitates histological quality tissue sampling.
- Innovative one-button adjusters for needle depth and sheath length provide easy and precise one-hand control.
- V-notch laser etched markings for enhanced needle echogenicity under ultrasound.
- Smooth sheath ensures pushability in angulated EUS endoscope as well as protection for the working channel.
- Compatible with the full range of EUS endoscopes.



Handle FNB Trident™ with red locking devices, FNB needles with blue locking devices.

## EUS-FNA Premium Needle.


For diagnostic and therapeutic interventions.



- Co-Cr alloy needle utilized for enhanced needle flexibility, durability, and target accessibility, designed for diagnostic and therapeutic intervention at challenging anatomies.
- V-notch laser etched markings for enhanced needle echogenicity under ultrasound.
- Innovative one-button adjusters for needle depth and sheath length provide easy and precise one-hand control.
- Smooth sheath ensures pushability in angulated EUS endoscope as well as protection for the working channel.
- Compatible with the full range of EUS endoscopes.

## EUS-FNA ECO Needle.

For standard punctures.

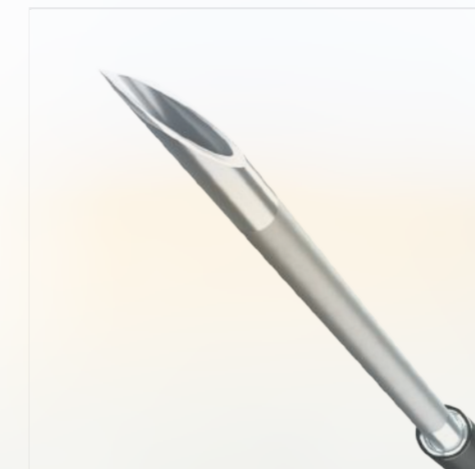

- Stainless steel needle ensures good needle flexibility, durability, and target accessibility for standard EUS punctures.
- Bevel tip facilitates quality tissue acquisition.
- Innovative one-button adjusters for needle depth and sheath length provide easy and precise one-hand control.
- Sandblasting needle treatment technology delivers clear needle echogenicity.
- Smooth sheath ensures pushability in angulated EUS endoscope as well as protection for the working channel.
- Compatible with the full range of EUS endoscopes.
- The EUS-FNA ECO needle combines good functionality and operating efficiency in standard EUS procedures.